

# FIELD ADJUSTABLE LED FLOOD LIGHTS



BWFL-15W-X-X-X



BWFL-30W-X-X-X



BWFL-60/50/40W-X-X-X

## ► PRODUCT FEATURES

- Corrosion resistant die cast aluminum housing
- 30K/40K/50K CCT selectable
- 60W-50W-40W selectable
- 120-277VAC, 0-10V Dimming
- On/off photocell comes standard on all models
- Available with black, bronze, white finish color
- Mount: 1/2" knuckle or bracket mount
- 50,000+ Hour LED life expectancy
- IP65 rated, for wet location
- 5 years warranty



## ► APPLICATION




# FIELD ADJUSTABLE LED FLOOD LIGHTS

## ELECTRICAL SPECIFICATIONS

Model#	Wattage	Lumen	CCT	CRI	Voltage	Dimming	Beam Angle	Working Temperature	IP Rating
BWFL-15W-X-X-X	15W	1950lm	3K/4K/5K Selectable	>70	120-277VAC	0-10V	7H7V	-40~45°C	IP65
BWFL-30W-X-X-X	30W	3900lm							
BWFL-60/50/40W-X-X-X	60W	7800lm							
	50W	6500lm							
	40W	5200lm							


## DIMENSIONS

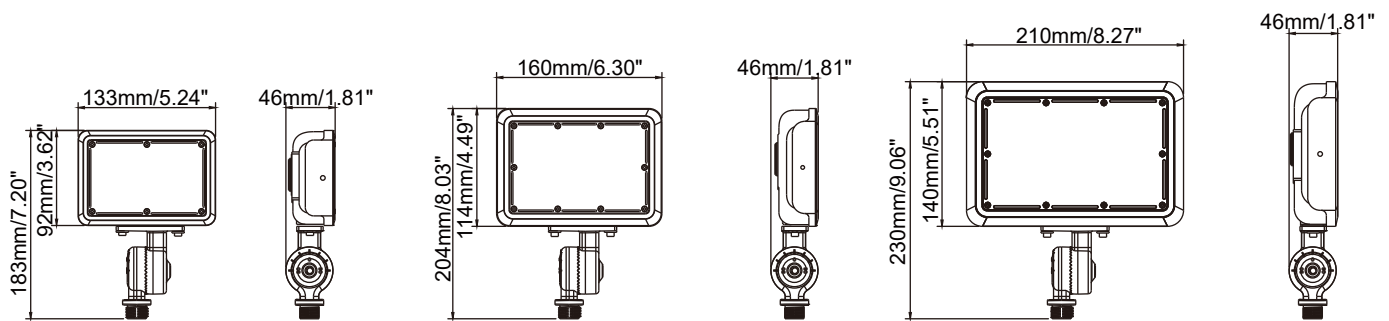

BWFL-15W-X-X-X

BWFL-30W-X-X-X

BWFL-60/50/40W-X-X-X

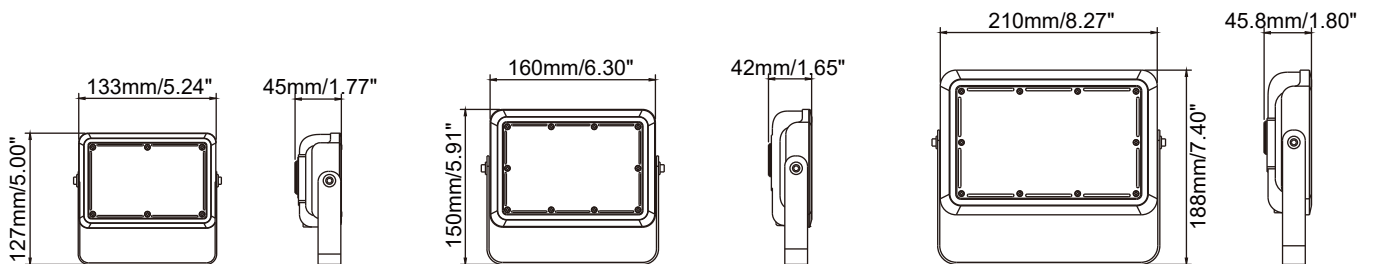

BWFL-15W-X-X-X


BWFL-30W-X-X-X

BWFL-60/50/40W-X-X-X

# FIELD ADJUSTABLE LED FLOOD LIGHTS

## SELECTABLE SWITCHES GUIDANCE

15W/30W




DIP Switch for CCT & Photocell

60W



DIP Switch for Watt Control

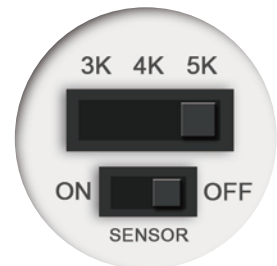

DIP Switch for CCT & Photocell

# FIELD ADJUSTABLE LED FLOOD LIGHTS

## CATALOG NUMBER BREAKDOWN

# BWFL-15W-X-X-X

1 2 3 4 5 6

1 Bestwon

2 Flood Light

3 Wattage

4 CCT

5 Arm Options

6 Color Options

3 Wattage

15	15W
30	30W
60	60W-50W-40W Selectable

5 Arm Options

K	Knuckle
T	Trunion
KT	both Knuckle and Trunion included

4 CCT

30	3000K
40	4000K
50	5000K
CS	3K/4K/5K Selectable

6 Color Options

W	White
BR	Bronze
BL	Black

## PACKING

Model	Case Qtys	Case Dimensions	Case CBM	Loading Qtys 40HQ
BWFL-15W-XXX	24pcs	332x430x300mm	0.043m <sup>3</sup>	34560pcs
BWFL-30W-XXX	12pcs	332x245x360mm	0.029m <sup>3</sup>	28812pcs
BWFL-60/40/30W-XXX	8pcs	436x270x242mm	0.028m <sup>3</sup>	19360pcs